MICRO MATIC

Operating Instructions

Flexi-Draft Unit

This document is the property of Micro Matic A/S and must not be used, disclosed or reproduced without prior written authority.

www.micro-matic.com | Micro Matic A/S | Holkebjergvej 48 | DK-5250 Odense SV | Tel.: +45 66 17 11 22

24.04.15 - 105-617

Exchange of Flexi-Draft One-Way Beer Line

Fig. 1

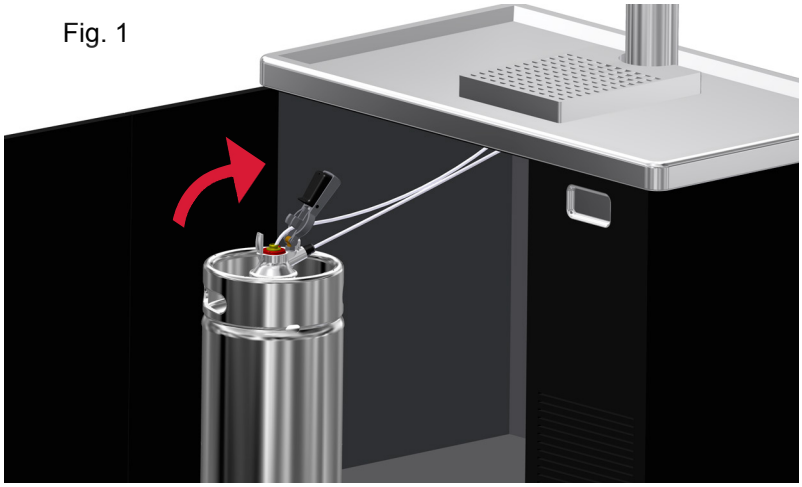

Dismount the Flexi-Draft dispense head.

Fig. 2

Dismount the one-way beer line as illustrated.

Fig. 3

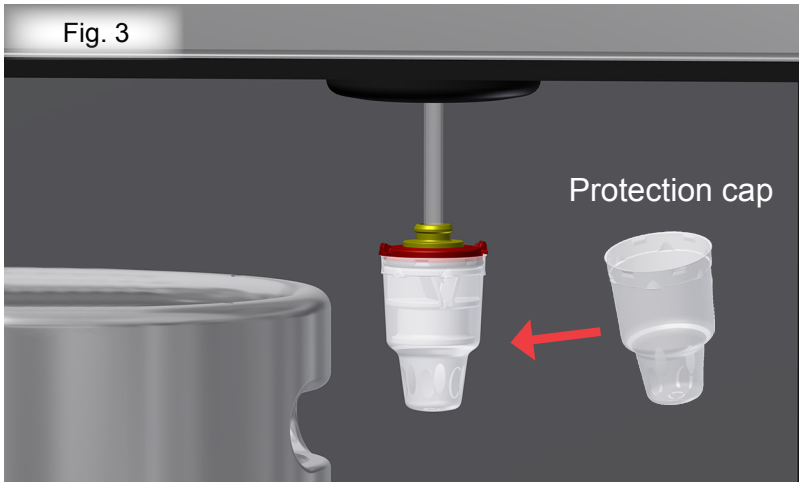

To prevent beer splash inside the guiding tube, put on the protection cap before removal.

Exchange of Flexi-Draft One-Way Beer Line

Fig. 4

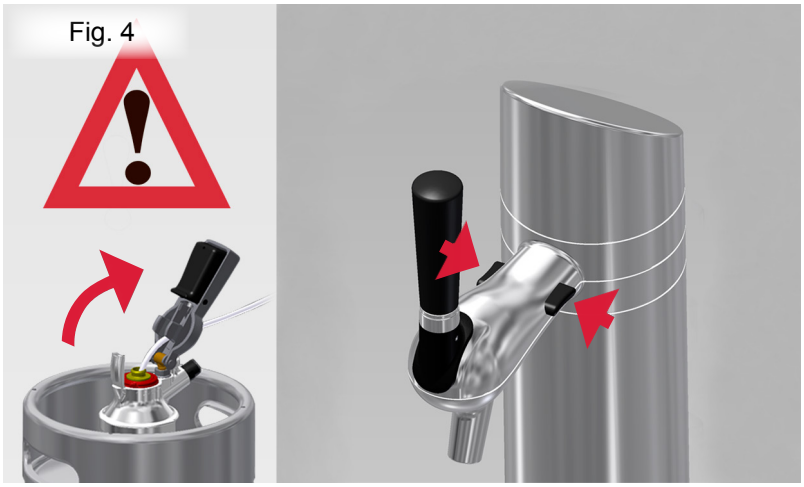

Attention: Make sure that the dispense head is disconnected before opening the font.

Open the Flexi-Draft font by pressing the two buttons.

Fig. 5

① The upper part will move forward by it self.
② Lift.

Fig. 6

Take out the one-way beer line and dispose.

Exchange of Flexi-Draft One-Way Beer Line

Fig. 7

Insert the new one-way beer line with protection cap into the guiding tube.

Fig. 8

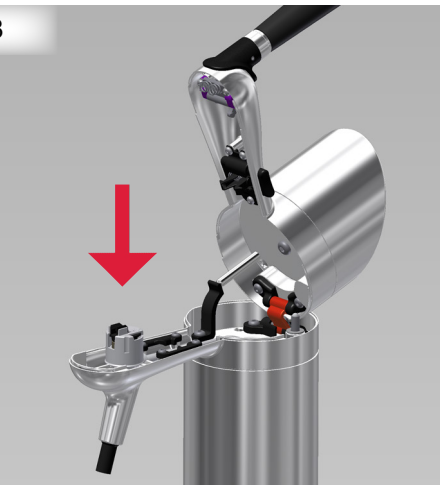

Fix the one-way beer line into the tap as illustrated.

Fig. 9

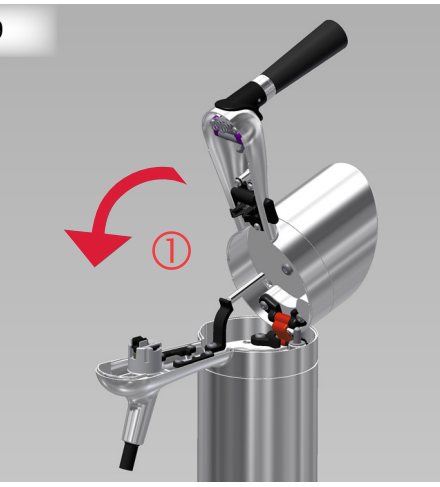

① Pull down the upper part and .....

Exchange of Flexi-Draft One-Way Beer Line

Fig. 10

② press to close the font.

Fig. 11

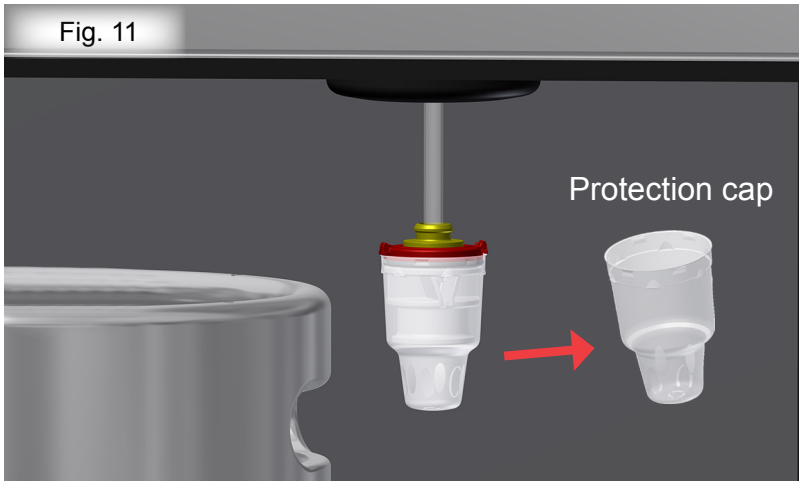

Attention: Remove protection cap before mounting in the dispense head. Remember to keep the protection cap for later use.

Fig. 12

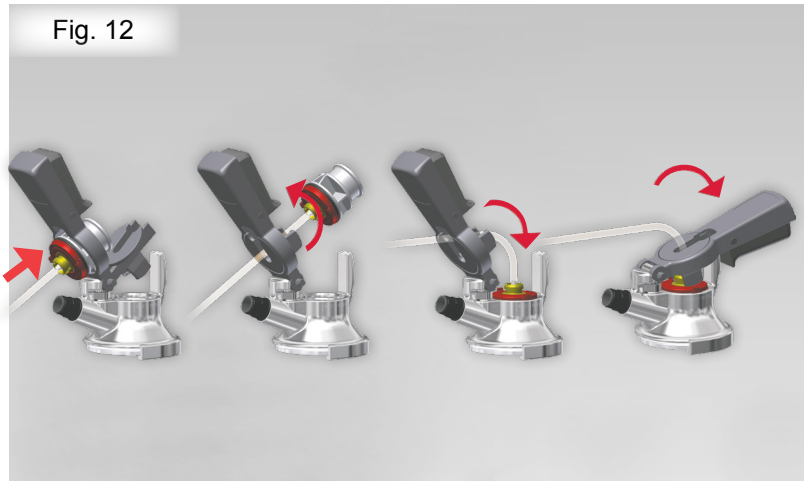

Mount the one-way beer line as illustrated.

Exchange of Flexi-Draft One-Way Beer Line

Fig. 13

Attention: Make sure that the Flexi-Draft font is closed before connecting the dispense head.

Mount the Flexi-Draft dispense head on the keg and press down the activation handle.

Attention: Make sure that the handle is locked in one move. If not a new beer-line must be used as the one-way function will break.

Put the keg in the Flexi-Draft fridge and close the door.

Fig. 14

Dispense and enjoy your beer.

Fig. 15

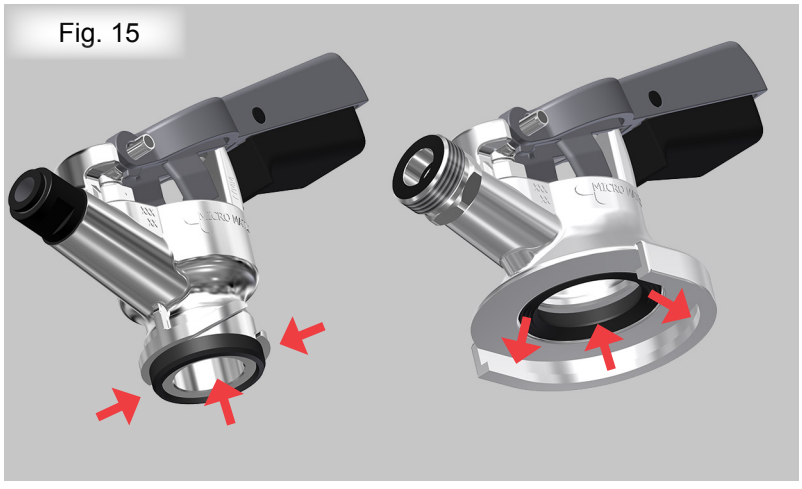

Maintenance: Regulary check and clean for beer-splash inside the dispense head if needed.